

Store the ASL codes of hardware connected to the computer system in the BIOS

100

Load the ASL codes stored in the BIOS to a memory

102

Build the ACPI tables according to the ASL codes loaded in the memory

104

Fig. 1 Prior Art

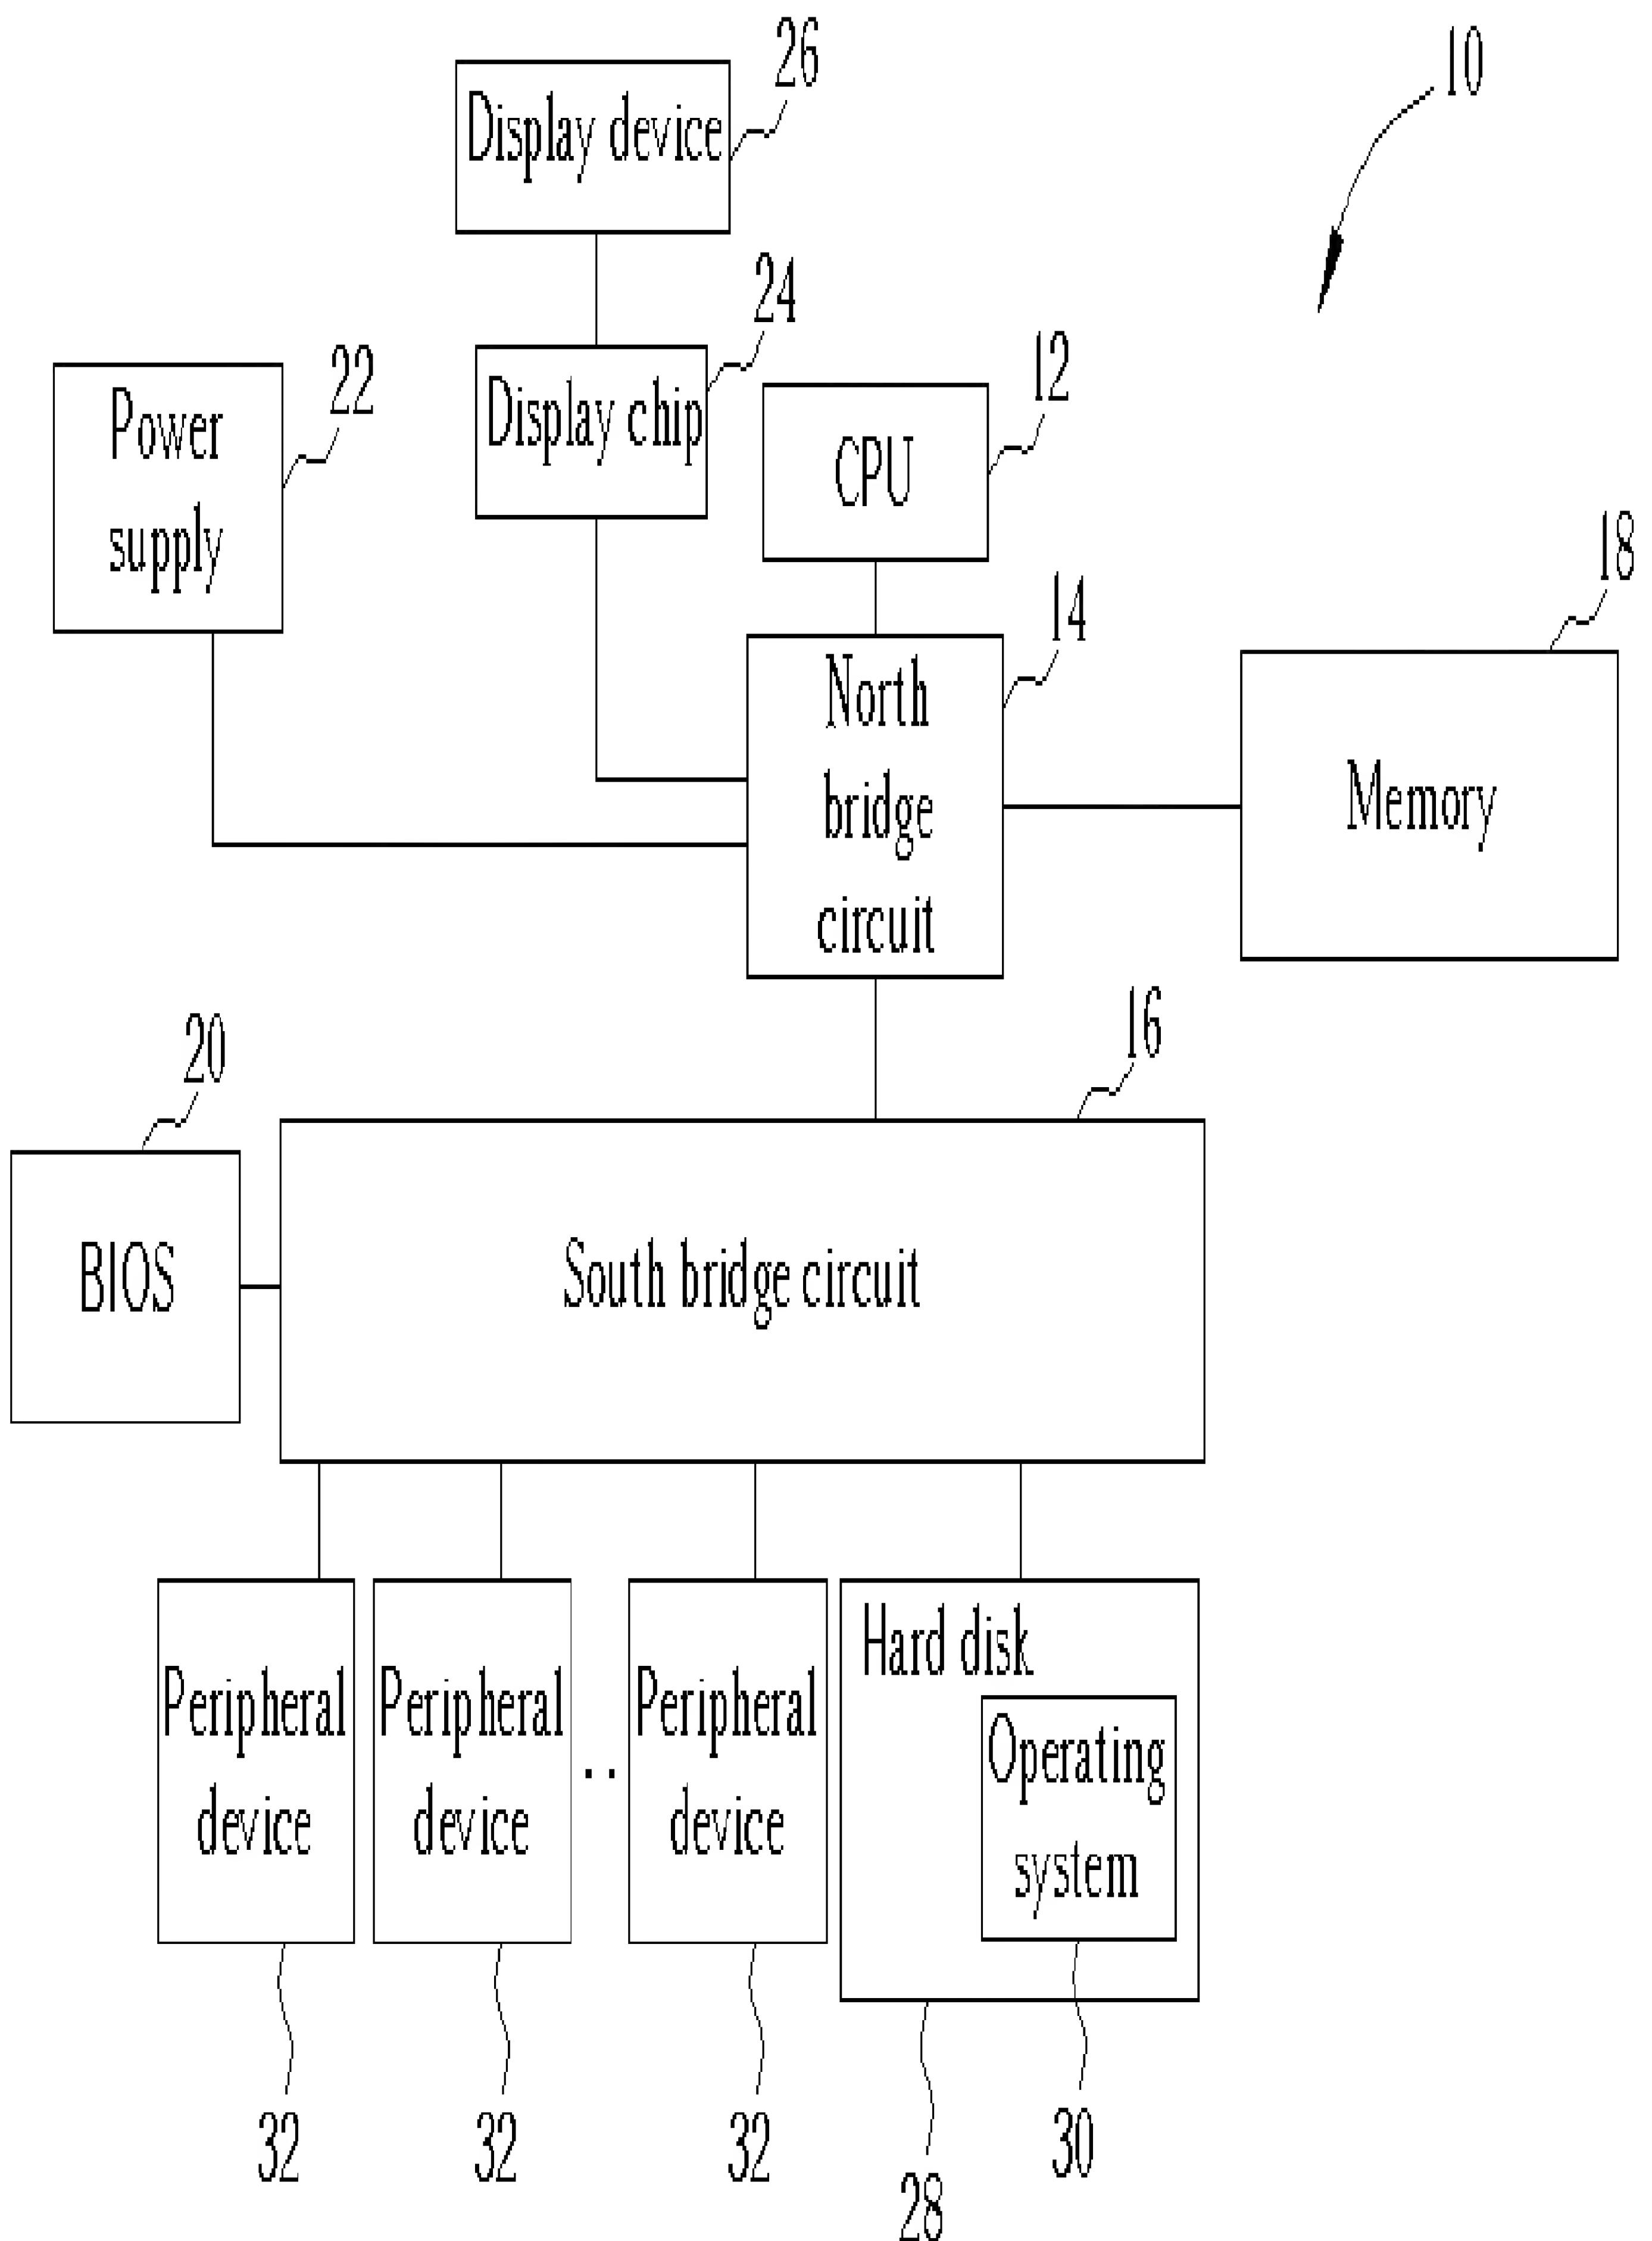


Fig. 2

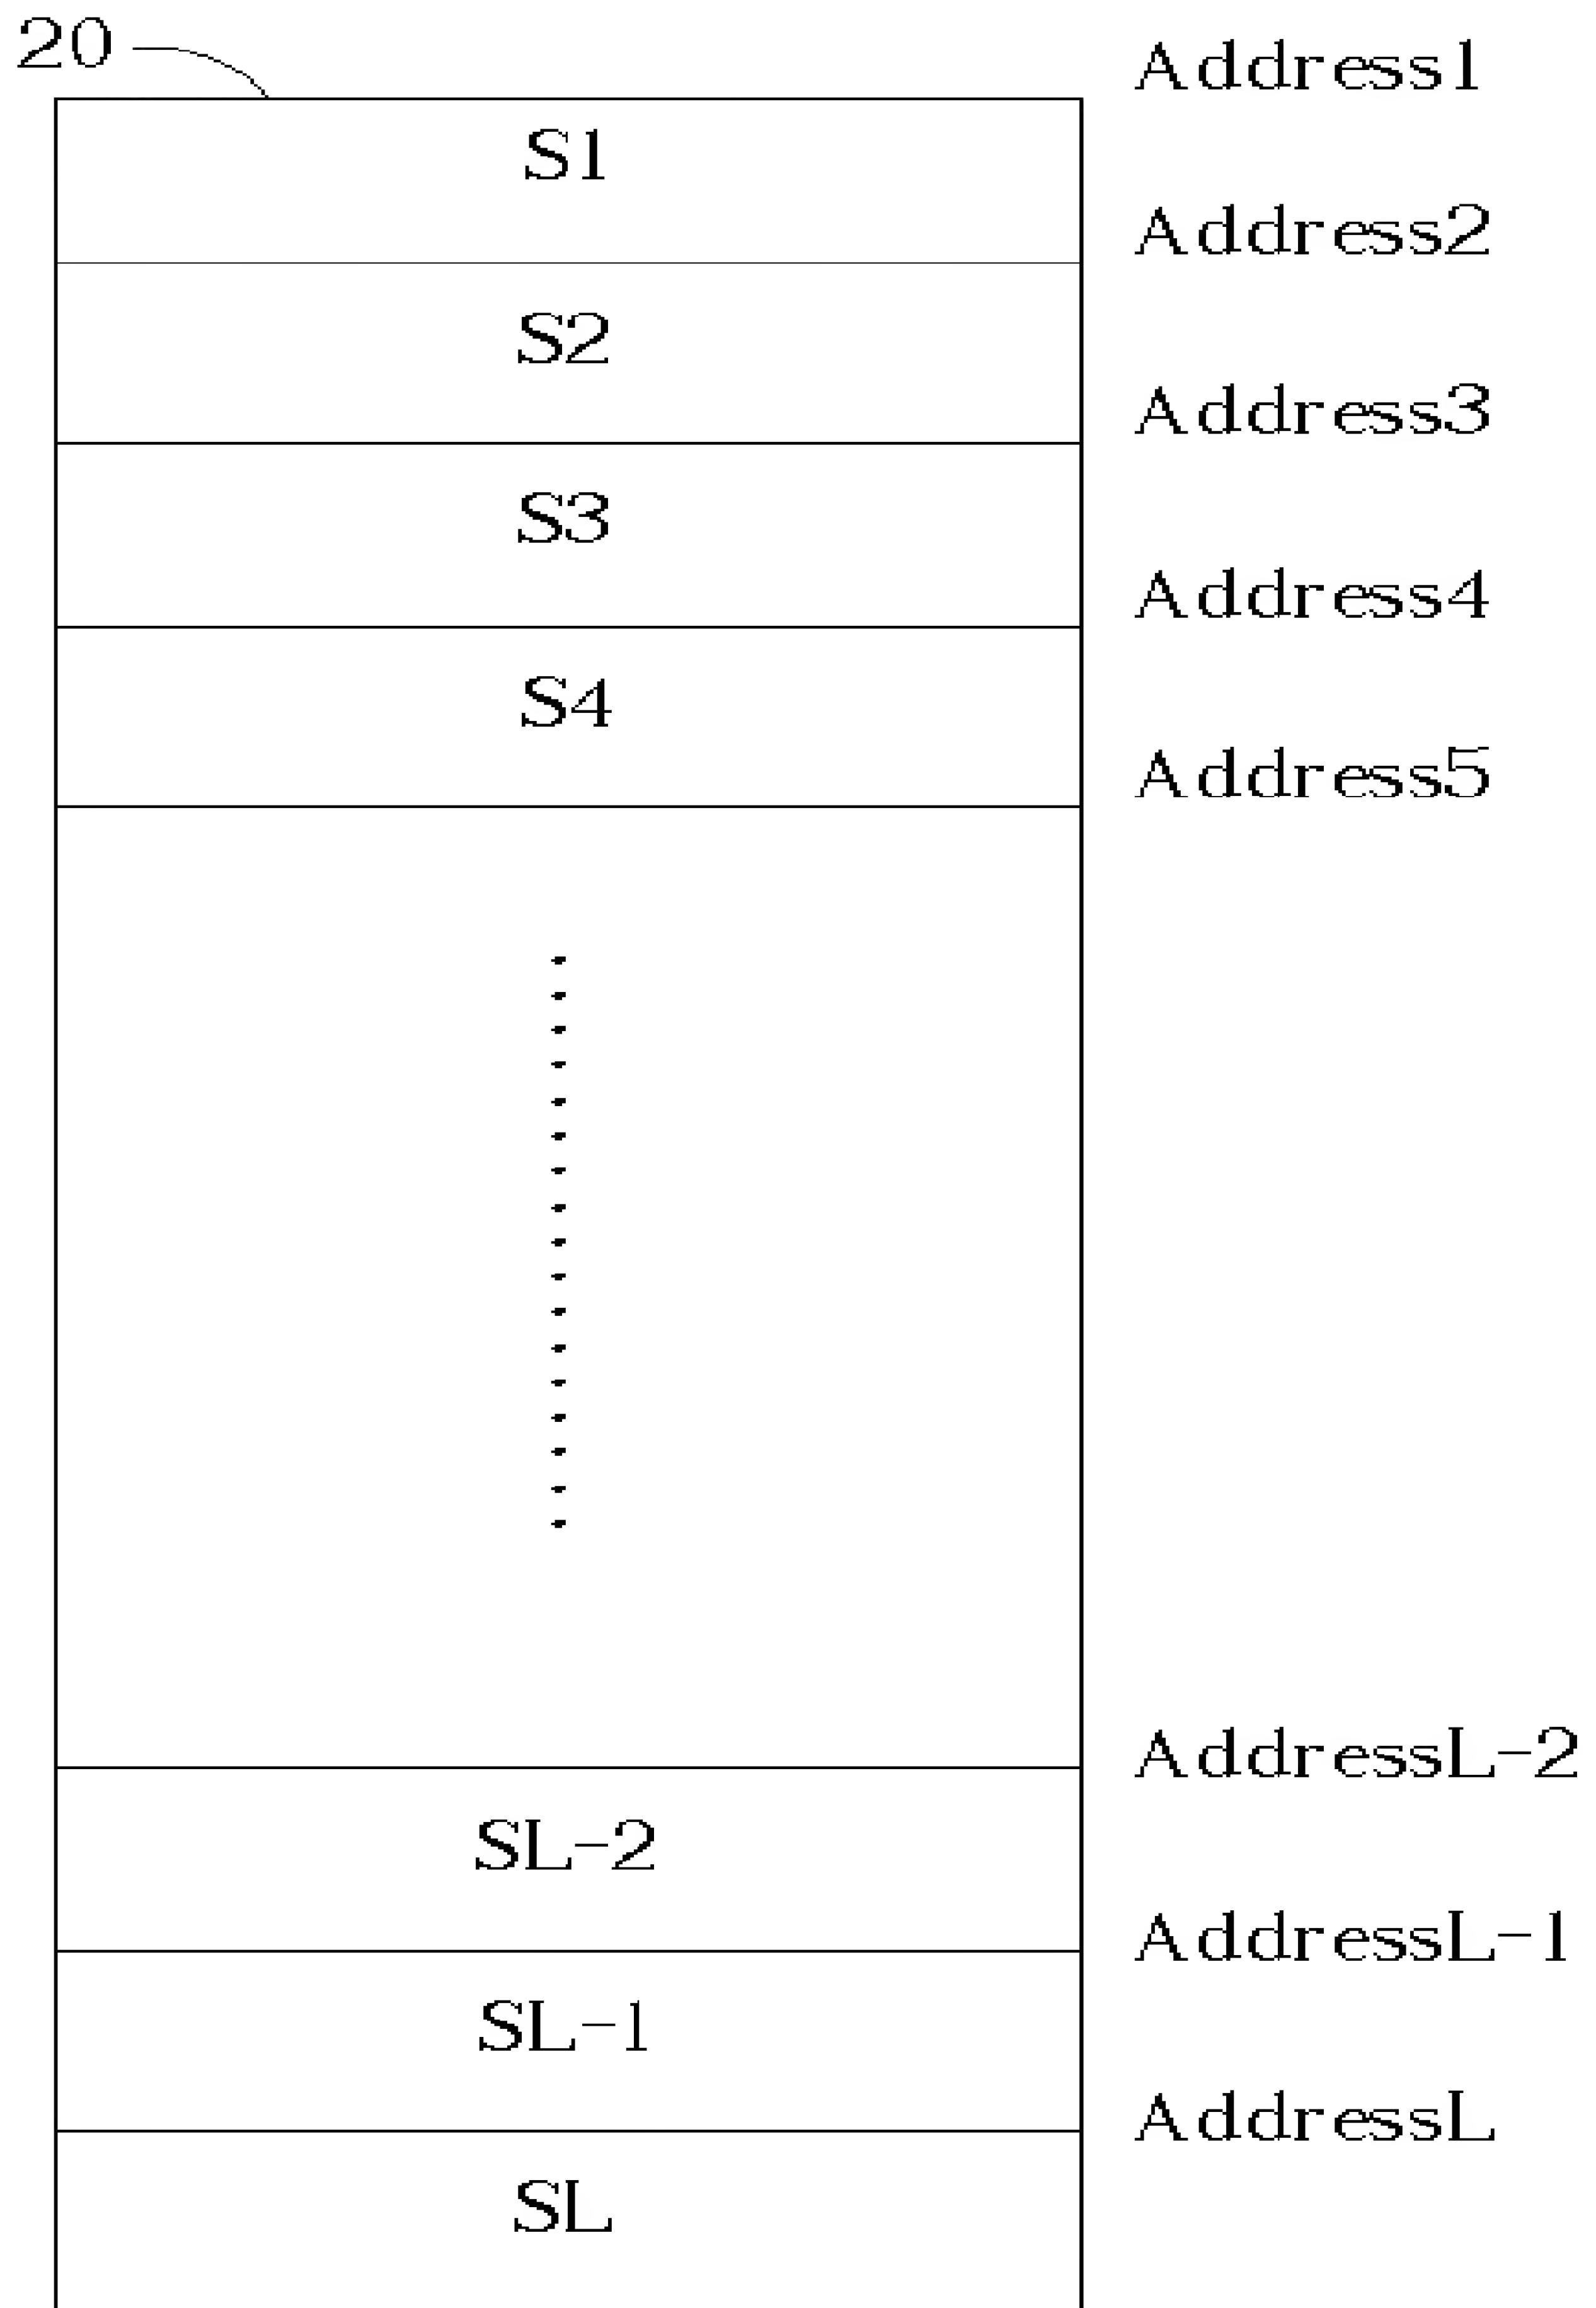


Fig. 3

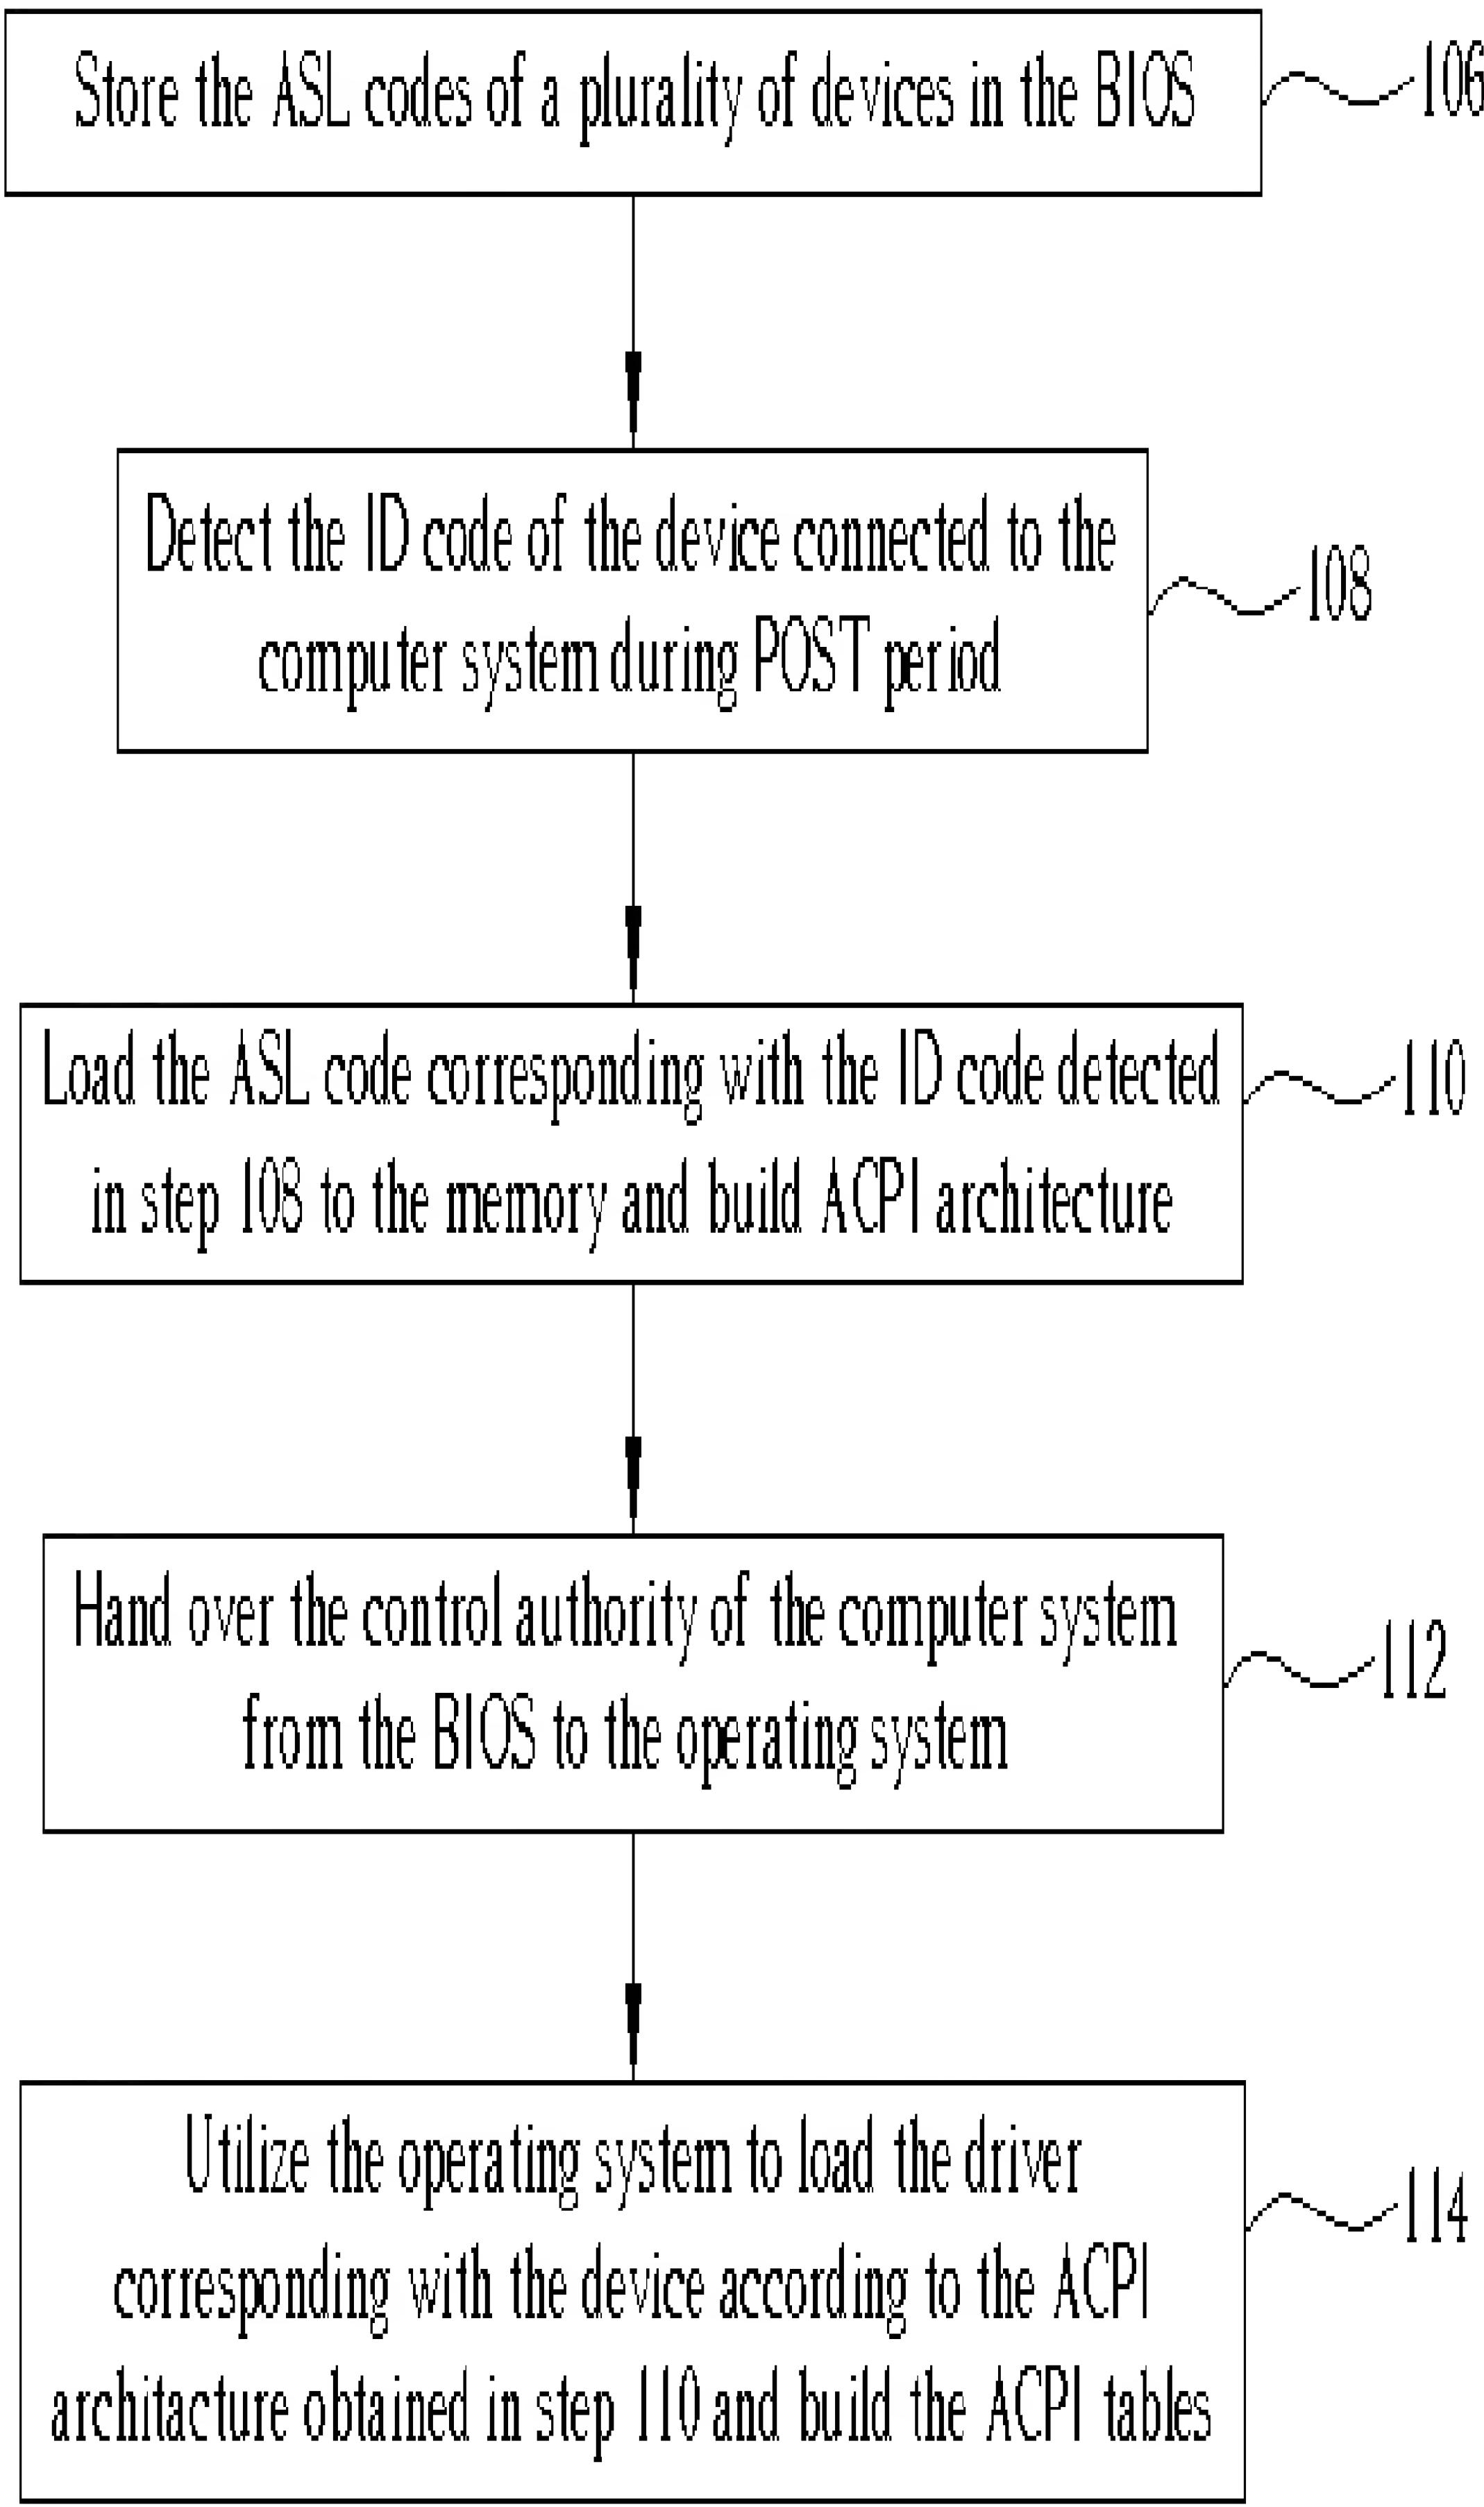


Fig. 4